


# Position Sensing

---


- Mechanical
- Optical
- Magnetic

# Mechanical Sensing - Microswitch





---

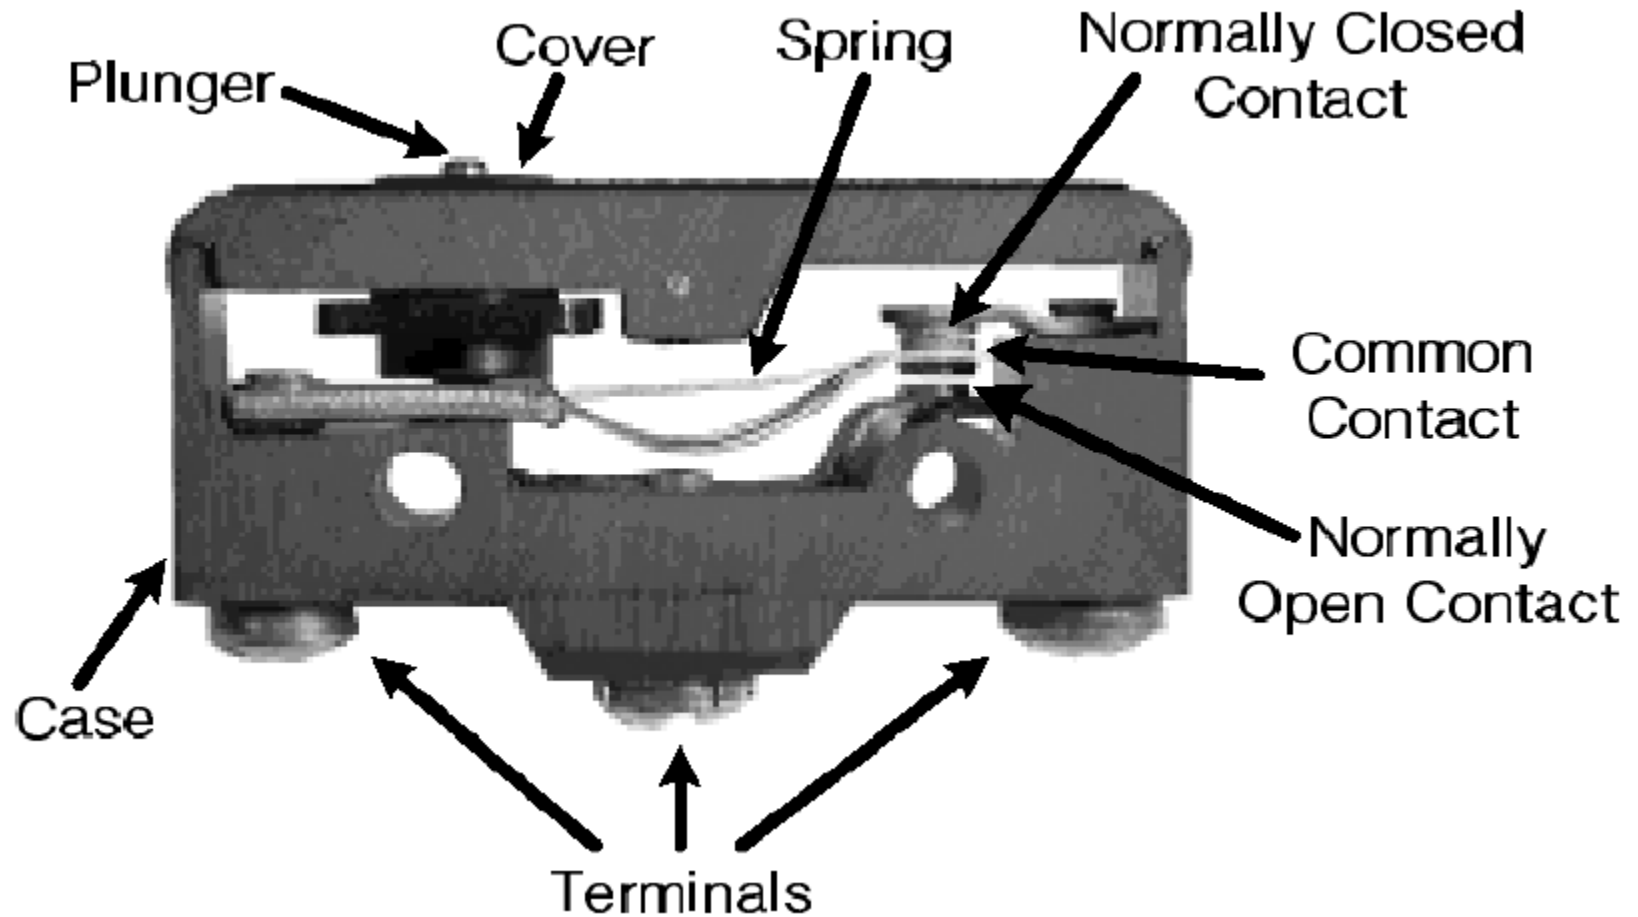





# Microswitch Operation

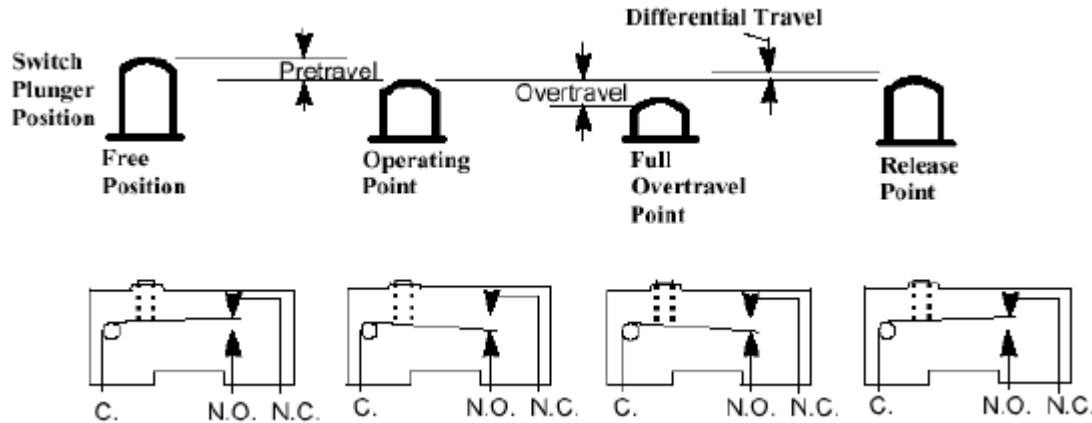

With Rigid Actuating Device



With Resilient Actuating Device Having Spring Rate K




*Switch exhibits mechanical hysteresis.*


# Microswitch Actuators




Pin plunger; in-line motion

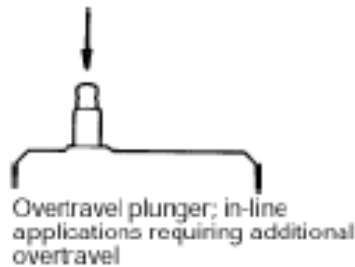


Overtravel plunger; in-line applications requiring additional overtravel

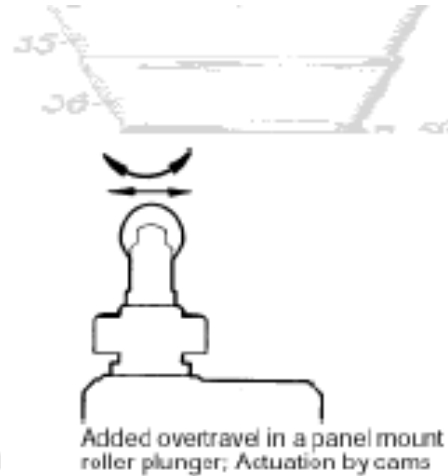


Added overtravel in a panel mount roller plunger; Actuation by cams

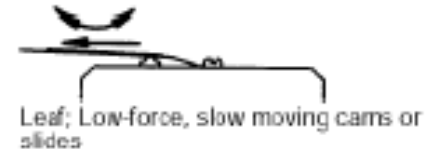


Leaf; Low-force, slow moving cams or slides




Roller lever; Very low force, fast moving cams



Roller leaf; Low-force, large movement actuation

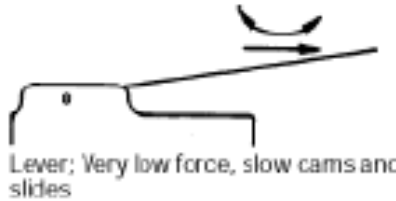

Lever; Very low force, slow cams and slides

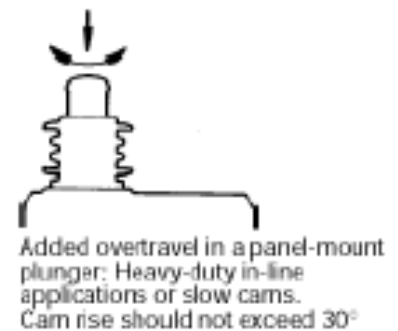

Added overtravel in a panel-mount plunger; Heavy-duty in-line applications or slow cams. Cam rise should not exceed 30°

# Optical Sensing


---

- LED's and Photodiodes
- Transmissive/Reflective
- Modulated/Unmodulated
- Light-on/Dark-on
- Fiber optic

# Transmissive & Reflective Sensors


## Opposed Mode Alignment

Opposed Mode Alignment: Move Emitter or Receiver Up-Down, Left-Right, and Rotate

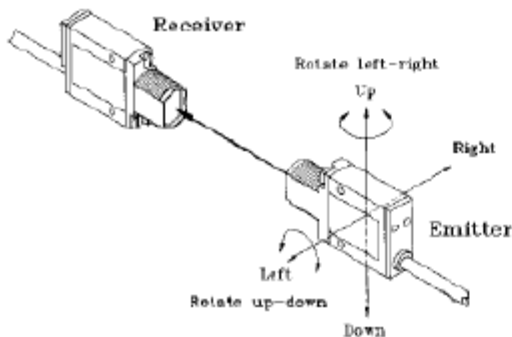


## Retroreflective Mode Alignment

Retroreflective Mode Alignment: Move Target Up-Down, Left-Right

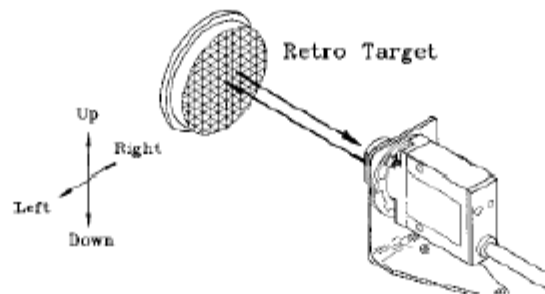


## Proximity (Diffuse) Mode Alignment

Diffuse Mode Alignment: Rotate Up-Down, Left-Right

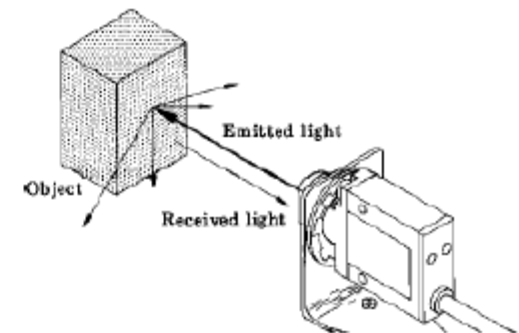


Object

## Divergent Sensing Mode

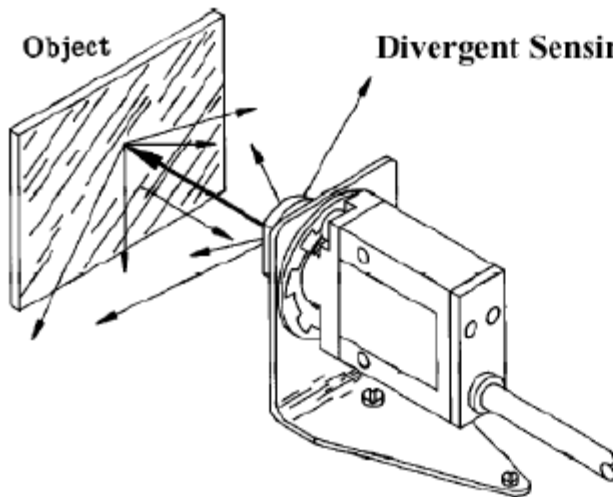


## Fixed-field Diffuse Sensing

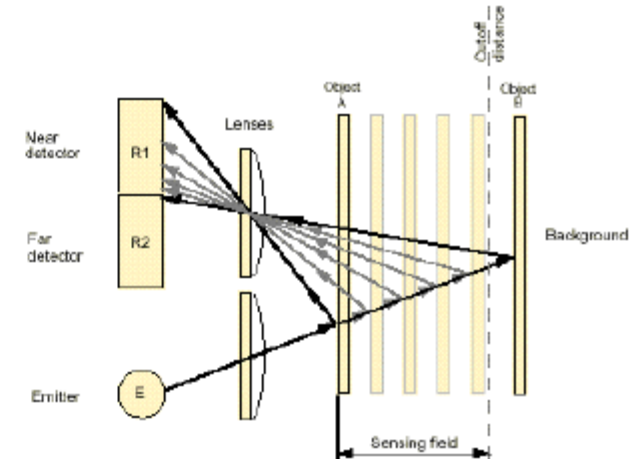

Object is sensed if amount of light at R1 is greater than the amount of light at R2

# Beam Pattern and Reflectance

## Typical Beam Pattern

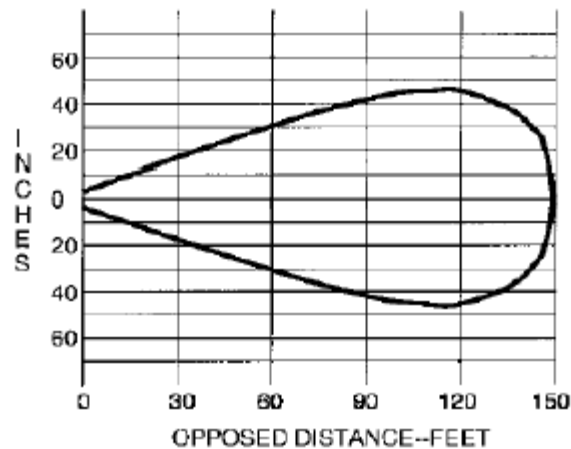


## RELATIVE REFLECTIVITY TABLE

<u>Material</u>	<u>Reflectivity (%)</u>	<u>Excess Gain Required</u>
Kodak white test card	90%	1
White paper	80%	1.1
Masking tape	75%	1.2
Beer foam	70%	1.3
Clear Plastic*	40%	2.3
Rough wood pallet (clean)	20%	4.5
Black neoprene	4%	22.5
Natural aluminum, unfinished*	140%	0.6
Stainless steel, microfinish	400%	0.2
Black anodized aluminum*	50%	1.8


\*NOTE: For materials with shiny or glossy surfaces, the reflectivity figure represents the maximum light return, with the sensor beam *exactly perpendicular* to the material surface

## Effective Beam

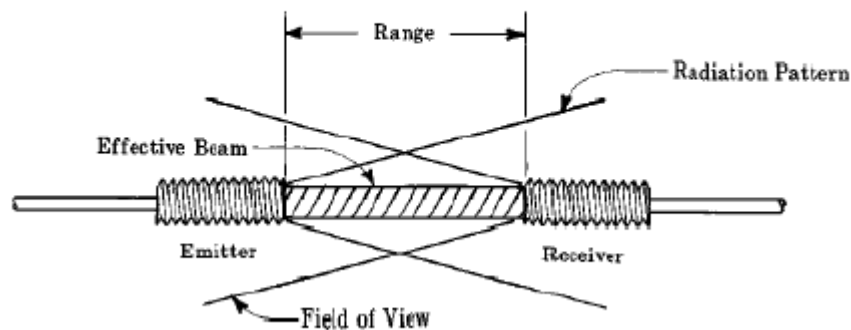

# Specular Reflection

---

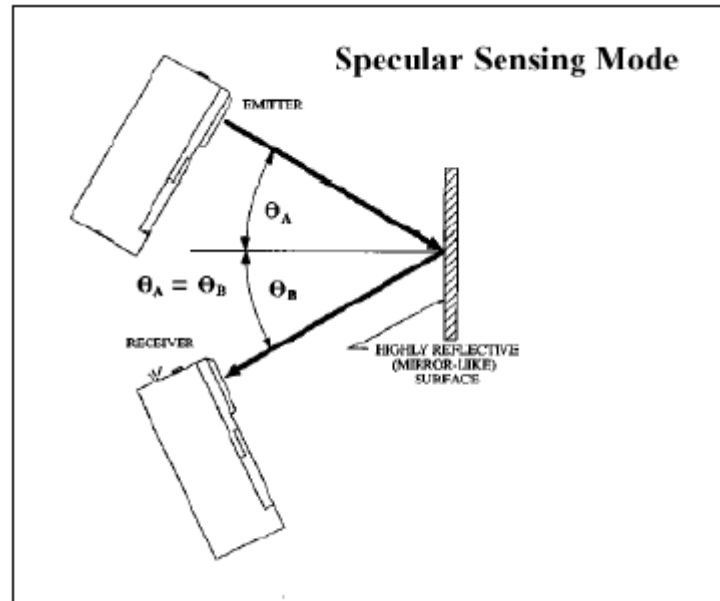



# Modulation

---

- “Chop” LED on and off at many kHz rate
- Bandpass filter after photodiode at the same frequency as chopping
- Threshold circuit after BPF generates on/off output


# Magnetic Position Sensors

---




- Reed switches (sense permanent magnet)
- Inductive proximity sensors (eddy current)
- Hall Sensors (sense permanent magnet)

# Inductive Proximity Sensor

---

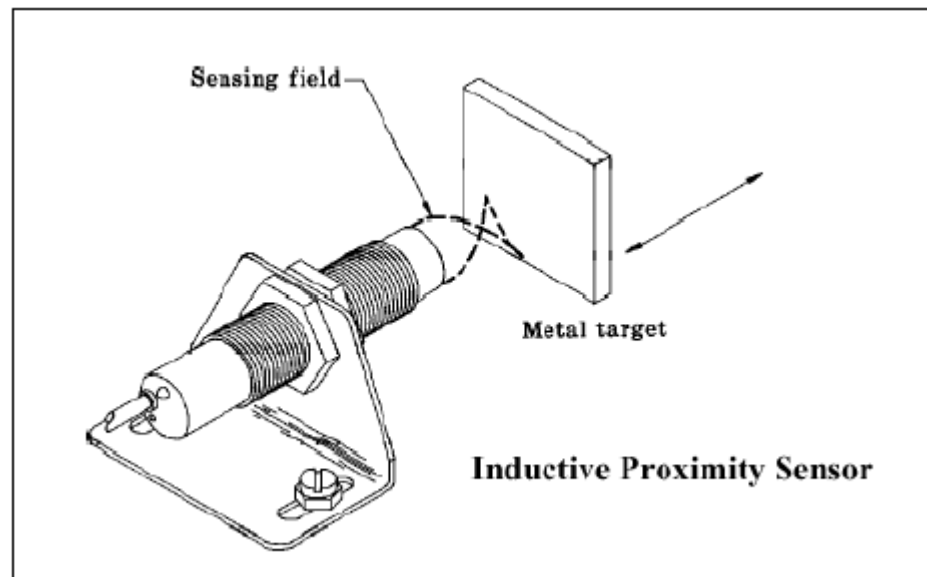

# Inductive Proximity Sensors

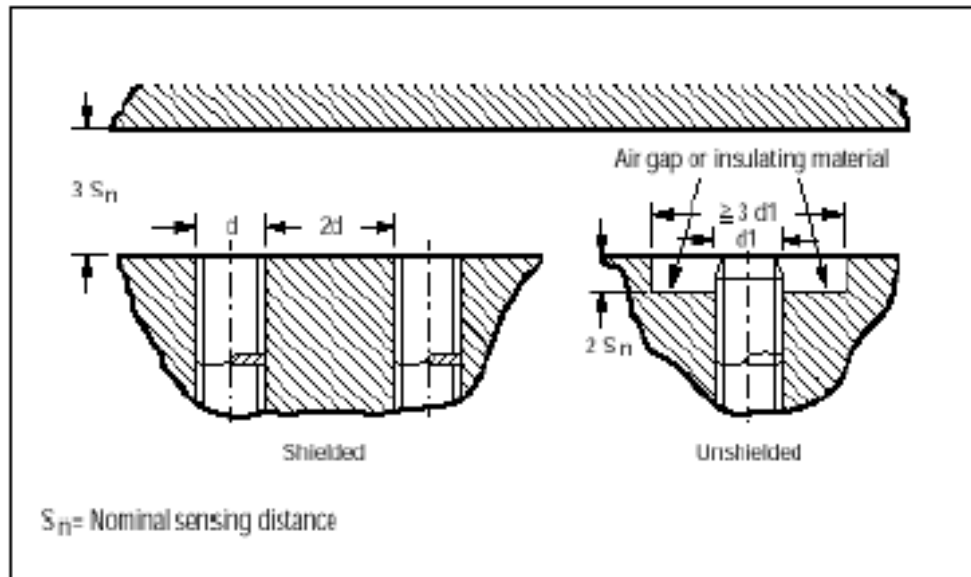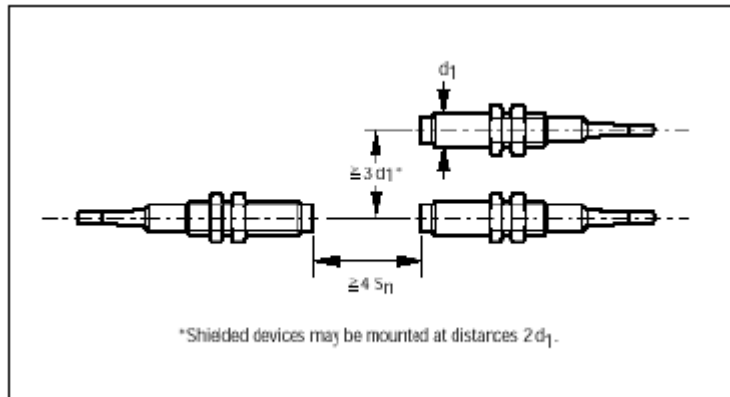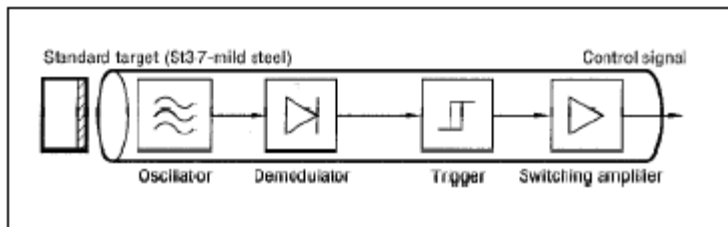

# Hall Sensors




---

- Hall effect:
  - constant voltage forces a constant current in semiconductor sheet
  - magnetic field flux lines perpendicular to current cause proportional voltage across sheet.
  - discovered by E.F.Hall in 1879
- Linear sensor needs voltage regulator and amplifier
- Switch also needs threshold circuit, with hysteresis



# Hall Switch

- Magnet motion
  - head-on
  - bypass or slide-by
- Total effective air gap (TEAG)
- Sensitivity, Hysteresis, & Temperature

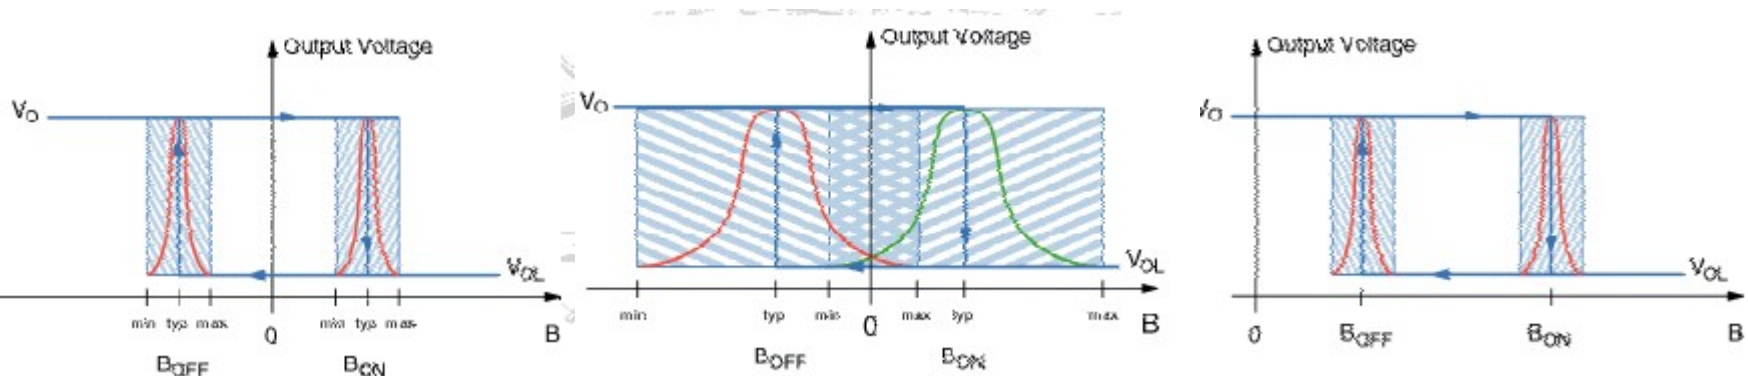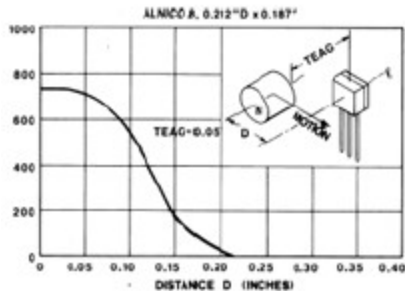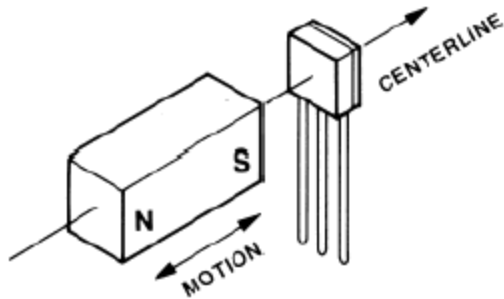




# Other Discrete Position Sensors

---

- capacitive
- ultrasonic
- variable reluctance (coil around magnet, senses moving ferrous material)

# Incremental Encoders

---

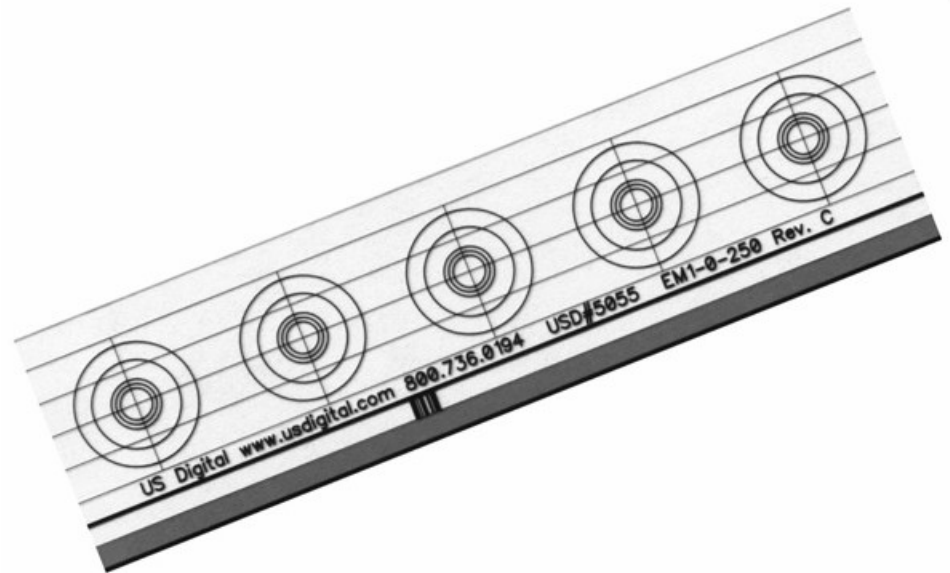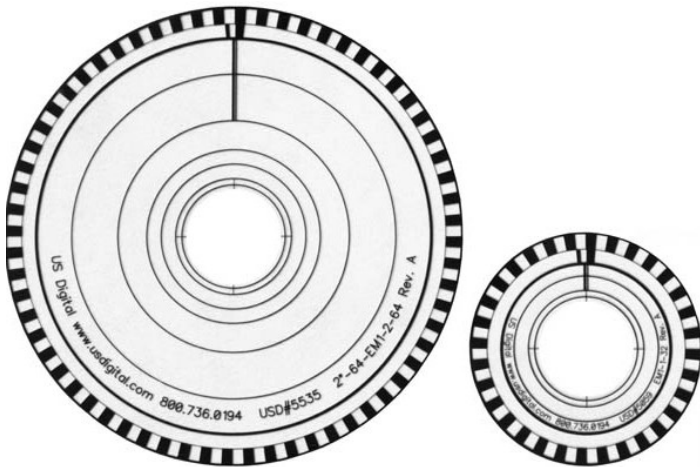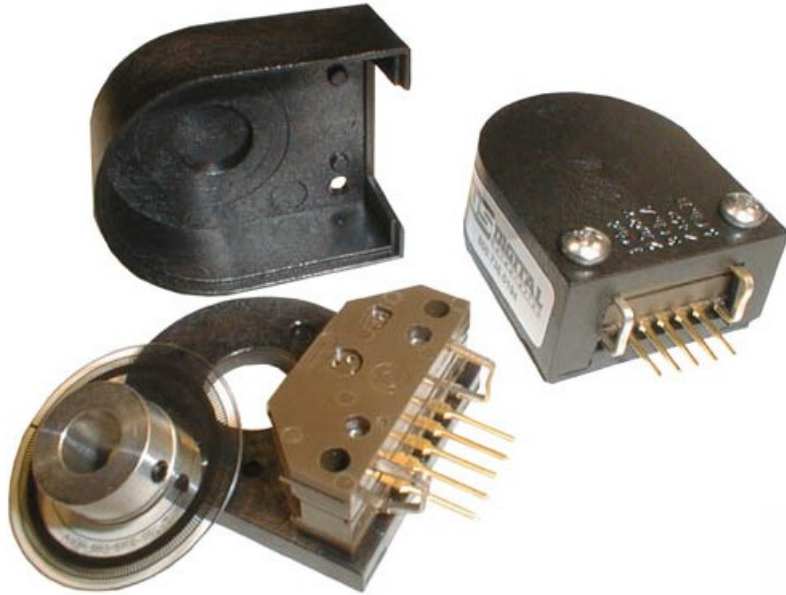




# Incremental Encoders

- Encoders typically run on +5V, not +24V
- Outputs are typ. not 24V compatible either





### Block Diagram:

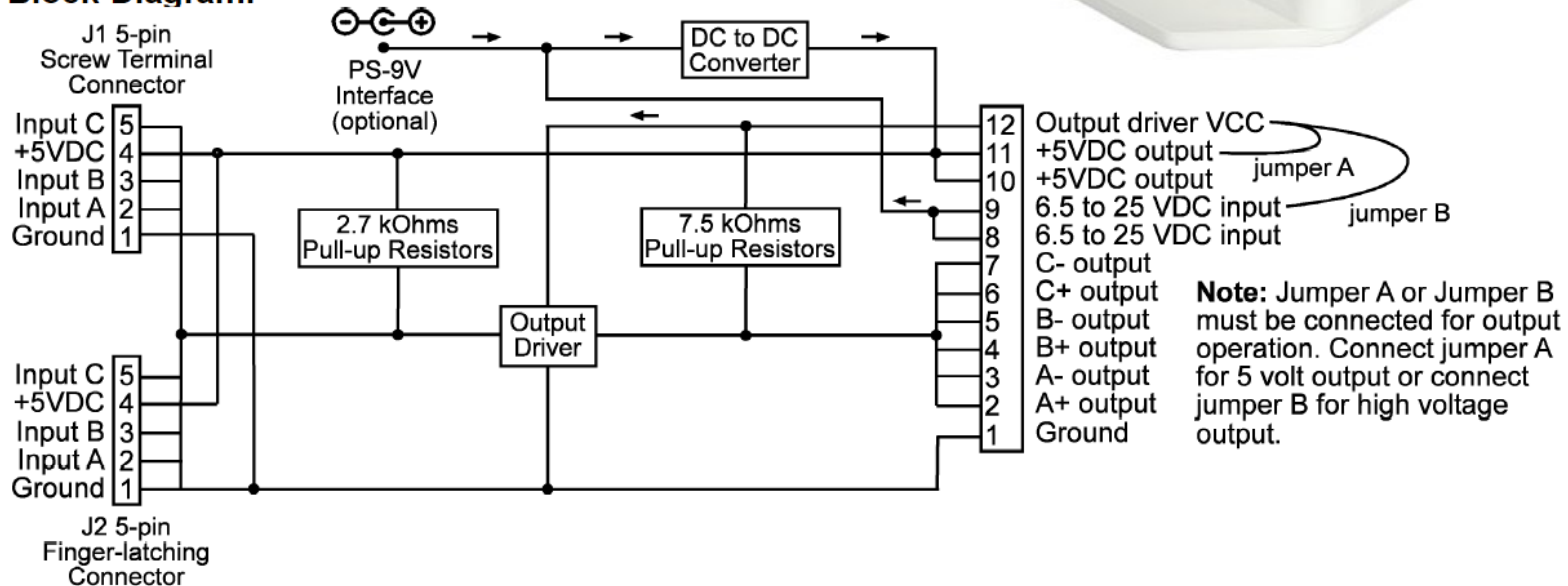

# Absolute Encoders



---

- doubling resolution requires adding another photodiode/LED pair
- cost is much higher than incremental
- does not require seeking to establish reference location

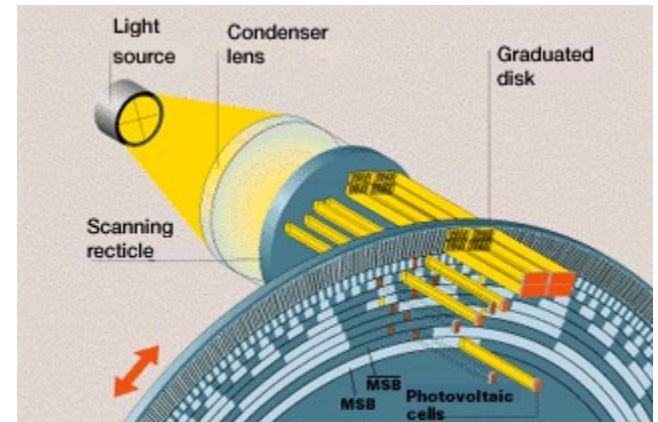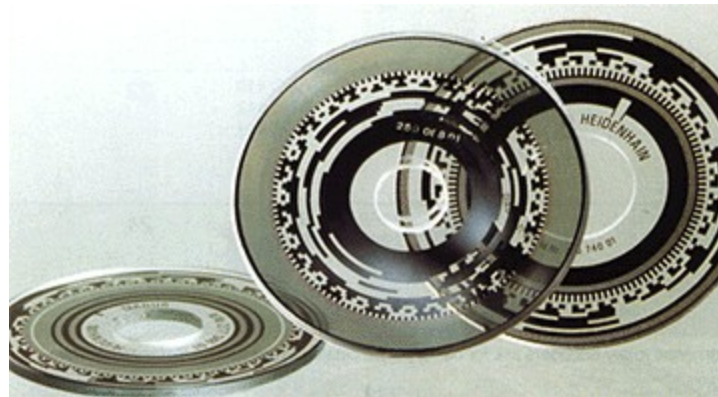

# Potentiometer


- A potentiometer (or pot) is a variable resistor wired to obtain a variable DC voltage proportional to position

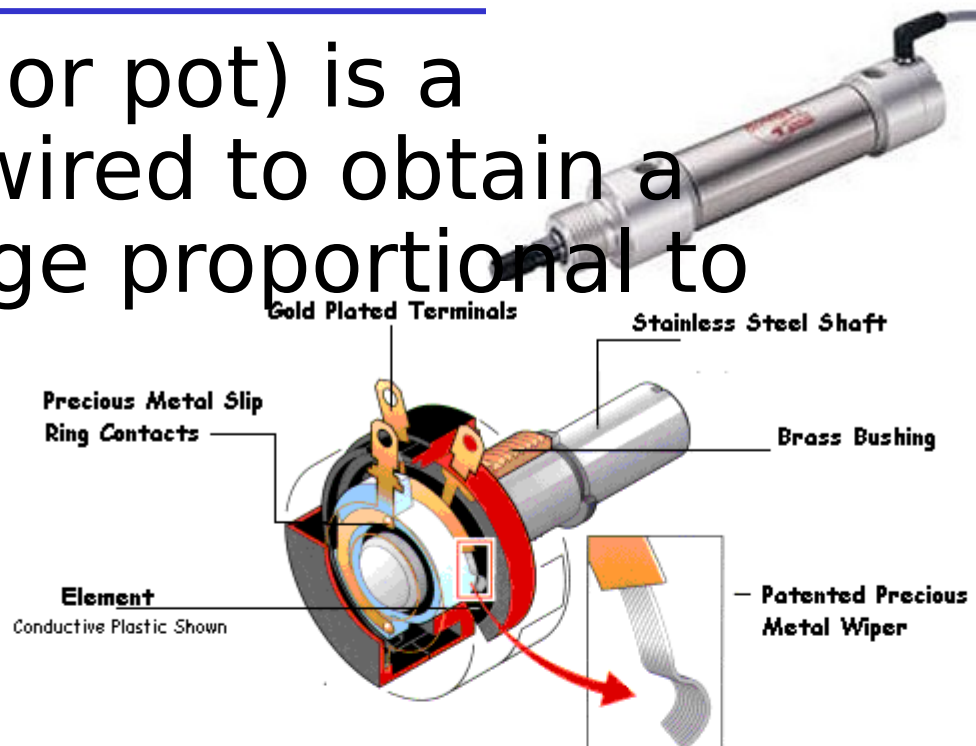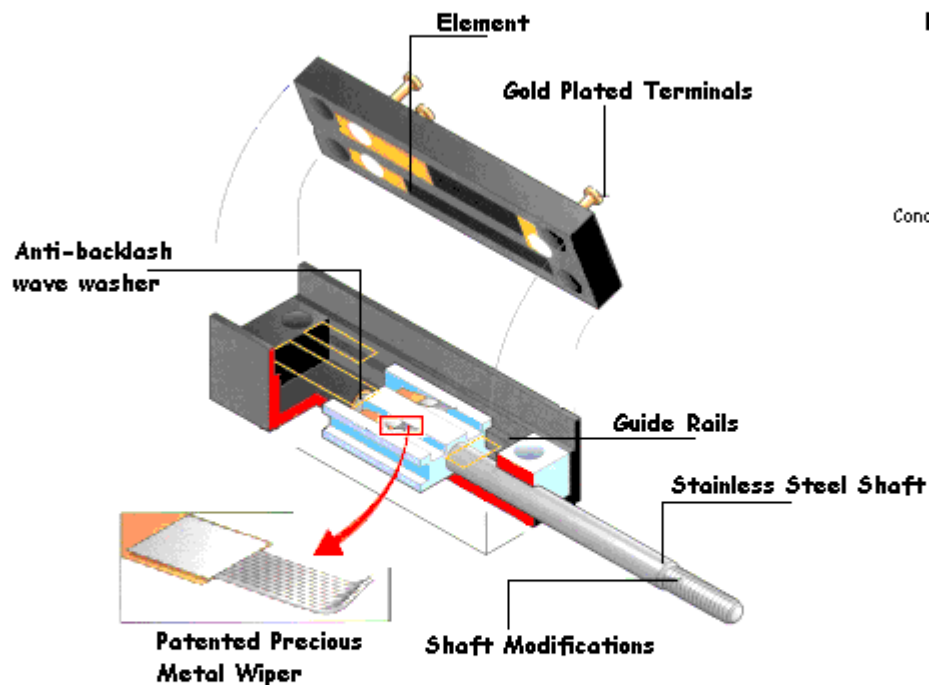


## Mounting Types

**Bushing mount** : Most commonly used. Mounts easily in the panel hole and secures with a mounting nut.

**Servo mount** : Recommended when the shaft is to be attached to a gear or other mechanism. Allows the operator to index to zero adjustment by turning the potentiometer.

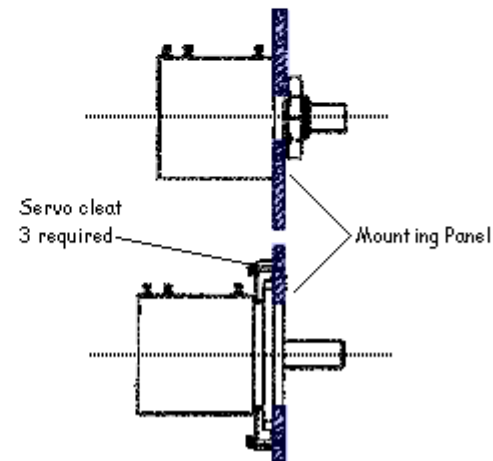

# Magnetostrictive Pos. Sensor

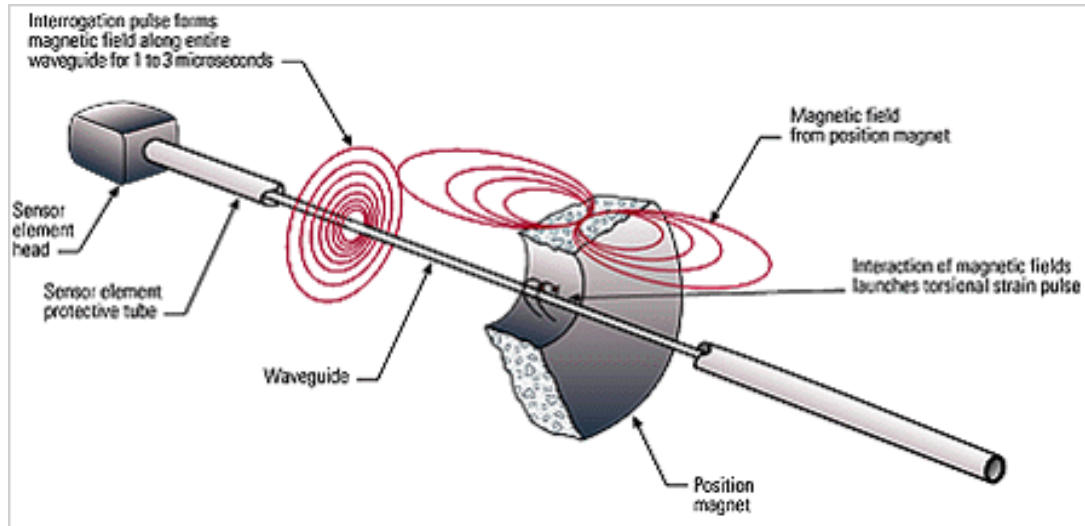

- Pulse sent down magnetostrictive material
- Pulse reflects off position magnet's field
- Position is proportional to  $t_{\text{rcvd}} - t_{\text{sent}}$
- Pulse propagates at  $\sim 2800$  m/s
- Resolution is  $\sim .001$ " with  $t_{\text{update}} \sim 1\text{msec/in.}$

# Magnetostrictive Sensor

