

EEPROM Burn


1. Install the software EtherCAT Slave Stack Code Tool.exe, then open the software EEPROM Programmer in the start menu to burn the EEPROM.




2. Power on the drive, and then directly connect the drive CN1 network port to the computer network port through a network cable, and set the computer network port IP to automatically obtain;

3. Open the software and follow the steps below:

Step (1) First, search for the drive through slaves->scan. After scanning, the following is shown. Note that 0xFF FFFFFFFF 0xFFFFFFFF or 0x1000 appears in the "Slaves" column, indicating that the drive has been scanned.

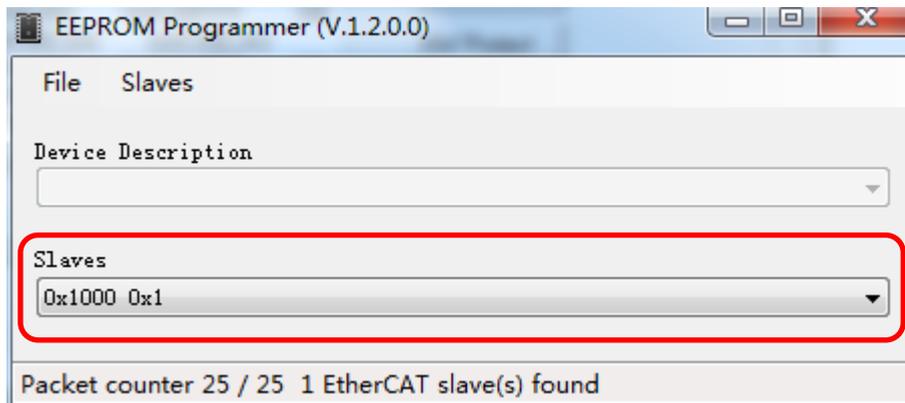

Step (2) Then, select the XML file to be updated through file->open, and the file name will be displayed in the software "DeviceDescription", as shown below:

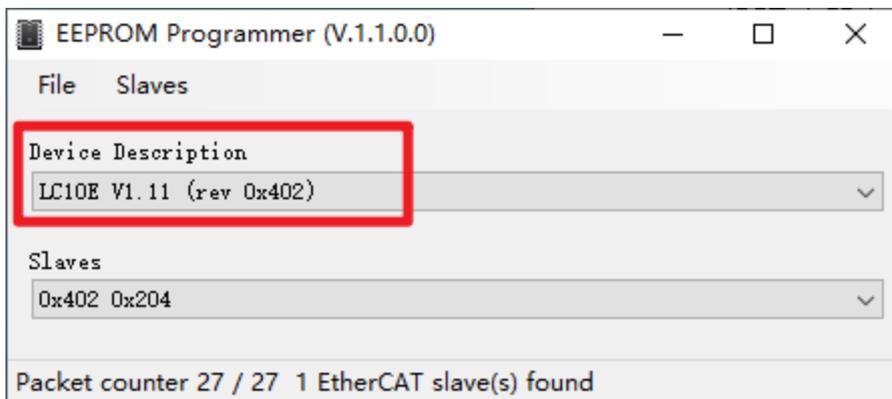

Step (3) Burn through slaves->program selected, and the burning is completed;

